



6" 60-WATT SOLSTICE SERIES LED LIGHT




**DIE-CAST FOR SUPERIOR HEAT DISSIPATION
RADIANT FRONT PLATE PROTECTS AND DE-ICES**

- 105° Adjustable Trunnion Bracket Mount
- Vertical Fins Maximize Heat Dissipation
- Low Power Consumption
- Cold Weather Optimized
- 88% Optically Pure


10° Narrow Beam

PART #	XIL-S6100	XIL-S6100W
HOUSING	Black	White

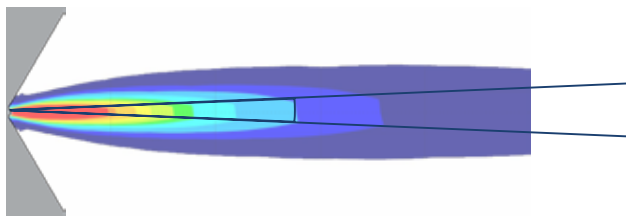

15° Medium Beam

PART #	XIL-S6102	XIL-S6102W
HOUSING	Black	White

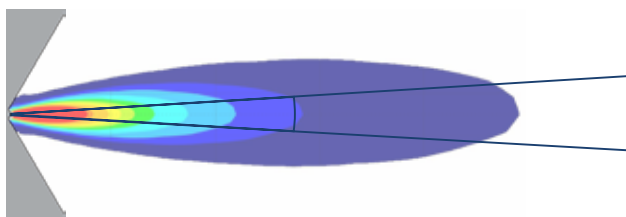

**10
WATT
L.E.D.S**

**9-50V
DC INPUT**

**DC
DIE-CAST
HOUSING**

**IP-68
WATERPROOF**

**HARNESS
INCLUDED**


**EX
EXTENDED
WARRANTY**

SPECIFICATIONS

WARRANTY	Extended
AVAILABLE HOUSING COLOR	Black or White
LUMENS (2800mA)	4,800 Lm
WATTAGE	60
WEIGHT	4.50 Lbs
LED LIFESPAN	50,000 Hours

IMAGES

FRONT



SIDE



TECHNICAL DETAILS


DIMENSIONS	3.5" x 4" x 6.75"
OPTIC PURITY	88%
DRIVEN AT	80%
INPUT VOLTAGE	9-50V DC
AMP DRAW (12V)	6A
IP RATING	IP-68
VIBRATION RATING	15.6 G _{rms}
CERTIFICATIONS	CE
OPERATING TEMP	-40 Celsius ~ +80 Celsius

ADDED FEATURES

- Weatherproof Deutsch Connector with Plug-and-Play Harness
- Die-Cast Aluminum Housing
- Polycarbonate Lens
- Patent # 0555208

35° Wide Beam

PART #	XIL-S6101	XIL-S6101W
HOUSING	Black	White

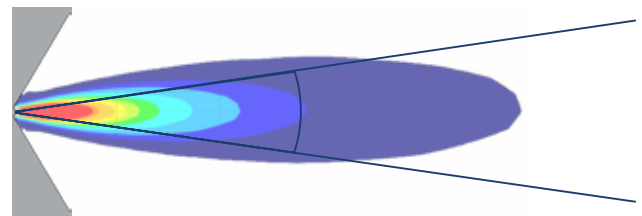

XTREME LED