



XMITTER LED LIGHT BAR



UPDATED MULTI-VOLT ELECTRONICS INCREASE OUTPUT PATENTED OPTICS FOR SEAMLESS BEAM PATTERN

- Used by United States Homeland Security & NASA
- Infrared, Amber, Red, Blue and Green Available
- Patent Pending Integrated Mounting System
- Isolated Rubber Mount for Vibration Control
- Low Power Consumption

3
WATT
L.E.D.S

9-42V
DC INPUT

AL
6061
HOUSING


IP-67
WATERPROOF

HARNESS
INCLUDED

COLORED
LEDS
AVAILABLE

EX
EXTENDED
WARRANTY

SPECIFICATIONS	
WARRANTY	Extended
AVAILABLE HOUSING COLOR	Black, White or Chrome
MOUNTING DEPTH	1.20"
LED LIFESPAN	50,000 Hours

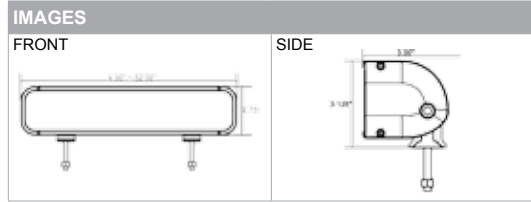

TECHNICAL DETAILS	
HEIGHT	3.13"
DEPTH	3.00"
DRIVEN AT	80%
INPUT VOLTAGE	9-42V DC
IP RATING	IP-67
VIBRATION RATING	15.6 G _{rms}
CERTIFICATIONS	CE
OPERATING TEMP	-40 Celsius ~ +80 Celsius


- ADDED FEATURES**
- Weatherproof Deutsch Connector with Plug-and-Play Harness
 - Billet Clamp Tube Frame Mounts Available
 - Extruded 6061 Aluminum Housing
 - Polycarbonate Lens
 - Patent # 0902872

XTREME LED

Euro Beam Light Bars

PART #	XIL-40	XIL-80	XIL-120	XIL-200	XIL-320	XIL-400	XIL-600	XIL-800	XIL-1000
L.E.D.S	4	8	12	20	32	40	60	80	100
LENGTH	4.00"	5.80"	7.80"	11.80"	17.60"	21.70"	31.80"	41.80"	51.80"
LUMENS (700mA)	720 Lm	1,440 Lm	2,160 Lm	3,600 Lm	5,760 Lm	7,200 Lm	10,800 Lm	14,400 Lm	18,000 Lm
AMP DRAW (12V)	1A	2A	3A	5A	8A	10A	15A	20A	25A
WEIGHT	1.80 Lbs	2.50 Lbs	3.30 Lbs	5.00 Lbs	6.70 Lbs	9.00 Lbs	13.10 Lbs	17.30 Lbs	19.00 Lbs

* Add W to end of part number to denote white housing

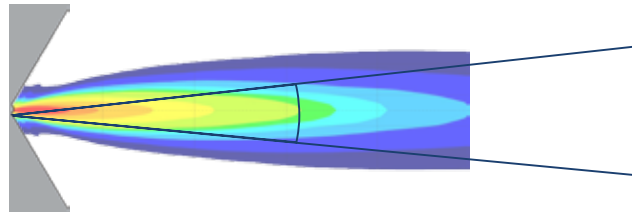

Flood Beam Light Bars

PART #	XIL-41	XIL-81	XIL-121	XIL-201	XIL-321	XIL-401	XIL-601	XIL-801	XIL-1001
L.E.D.S	4	8	12	20	32	40	60	80	100
LENGTH	4.00"	5.80"	7.8"	11.80"	17.60"	21.70"	31.80"	41.80"	51.80"
LUMENS (700mA)	720 Lm	1,440 Lm	2,160 Lm	3,600 Lm	5,760 Lm	7,200 Lm	10,800 Lm	14,400 Lm	18,000 Lm
AMP DRAW (12V)	1A	2A	3A	5A	8A	10A	15A	20A	25A
WEIGHT	1.80 Lbs	2.50 Lbs	3.30 Lbs	5.00 Lbs	6.70 Lbs	9.00 Lbs	13.10 Lbs	17.30 Lbs	19.00 Lbs

* Add W to end of part number to denote white housing

